Slide 1

Slide notes: If we choose to run the IES Cloud service on a port other than 80, then we can change this setting with the Configurer.
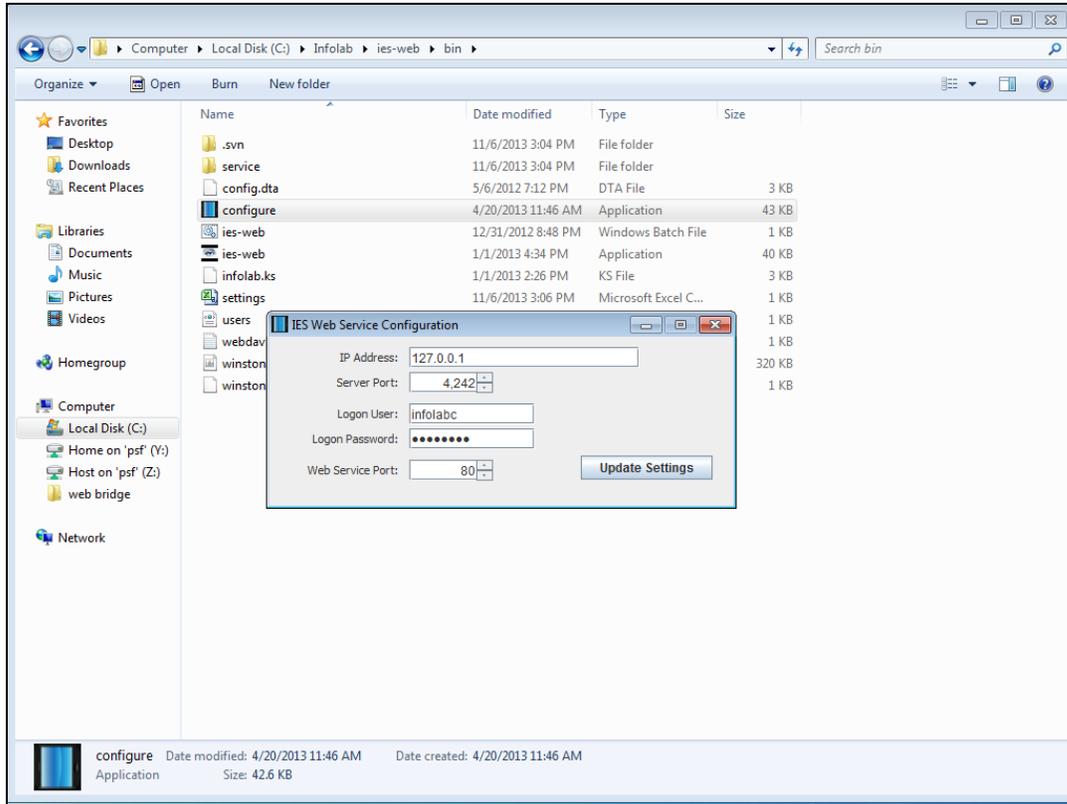
Slide 2
Slide notes:
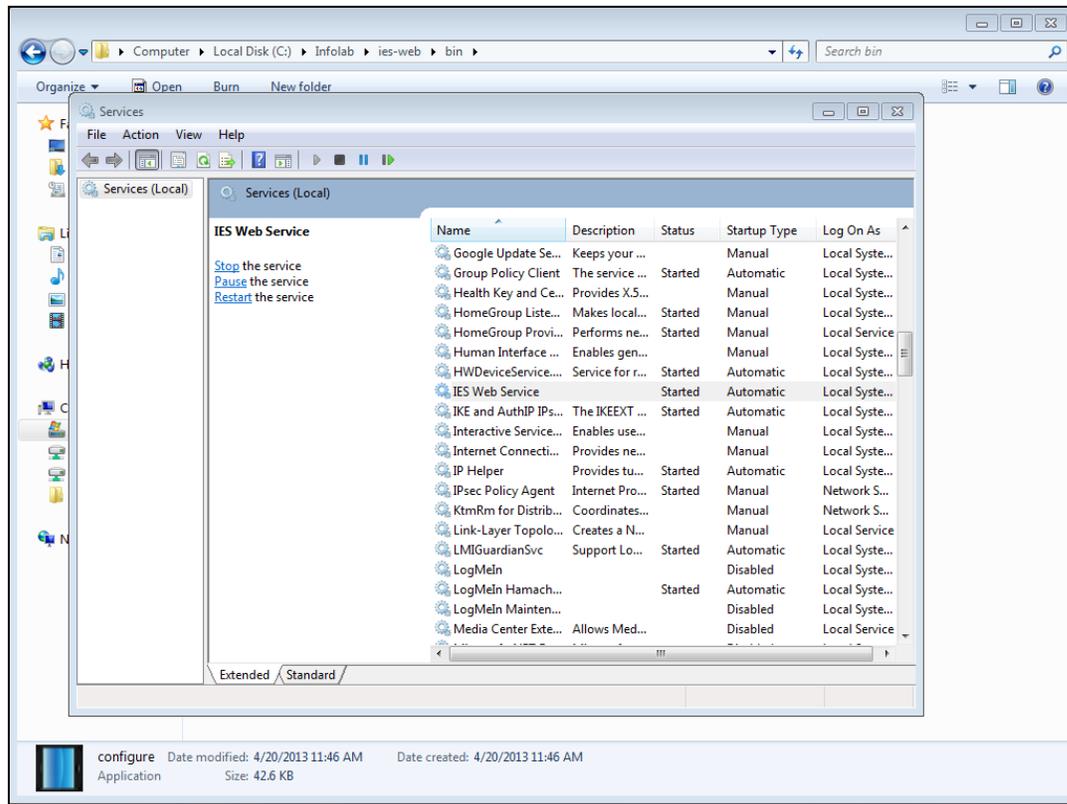
Slide 3

Slide notes: Having made a change to the settings, it is necessary to stop and start the IES Web service, but we should ensure that no Users are using the service while we do so.
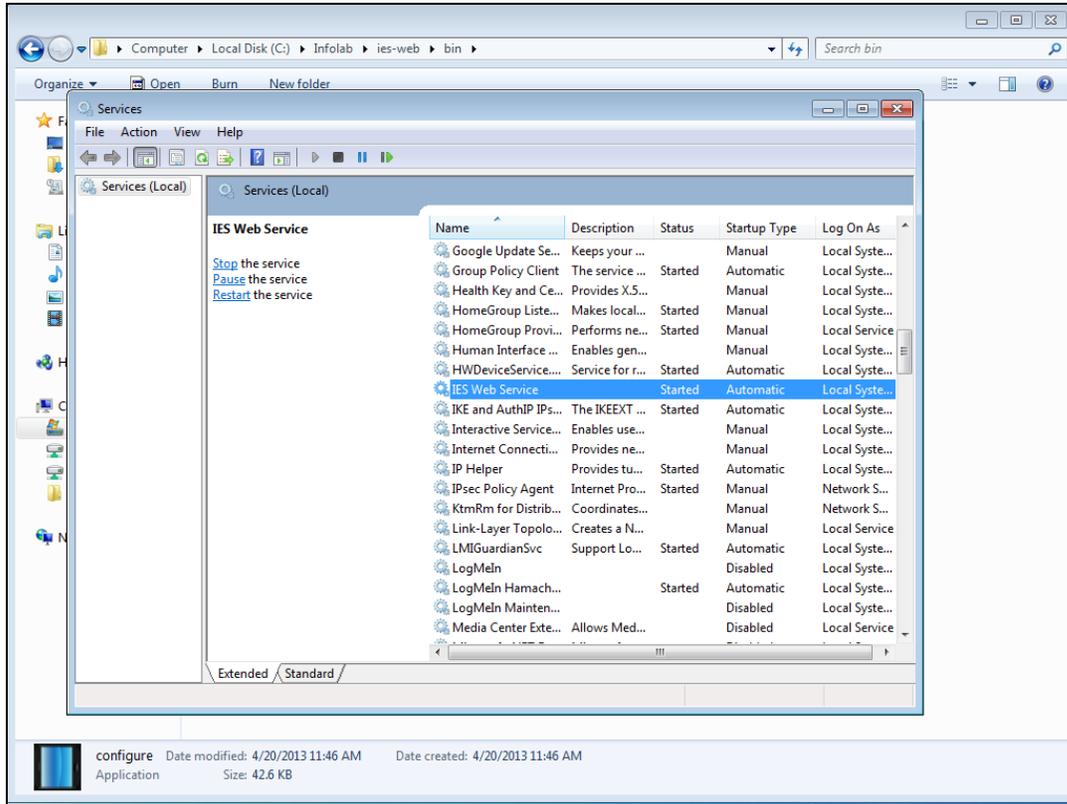
Slide 4
Slide notes:
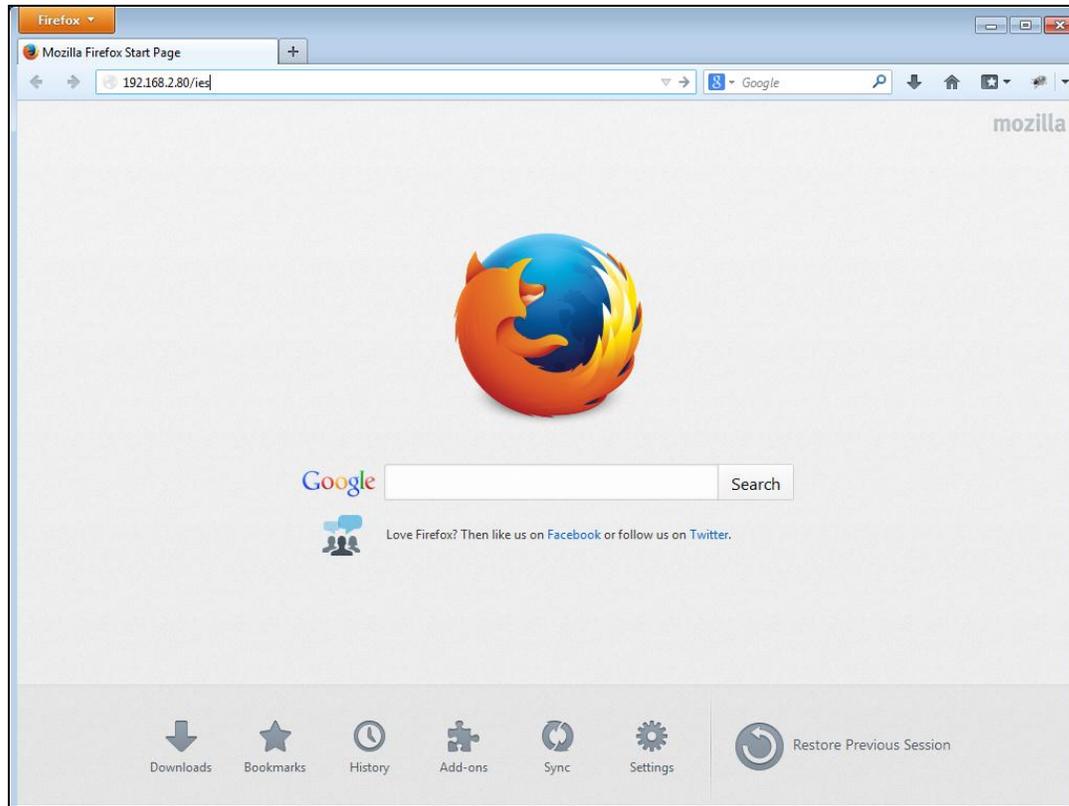
Slide 5

Slide notes: If our normal URL should look like the one shown here, as an example, then it will need to be changed to a URL that indicates the port that replaces the default port 80.
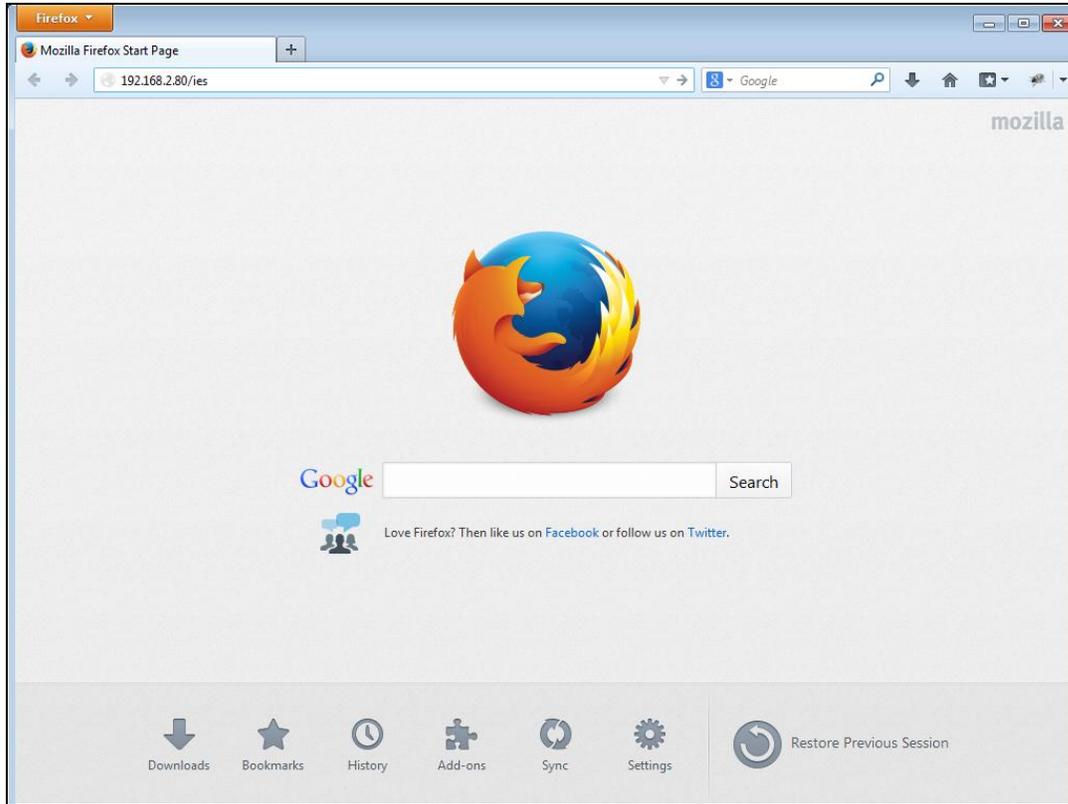
Slide 6
Slide notes:
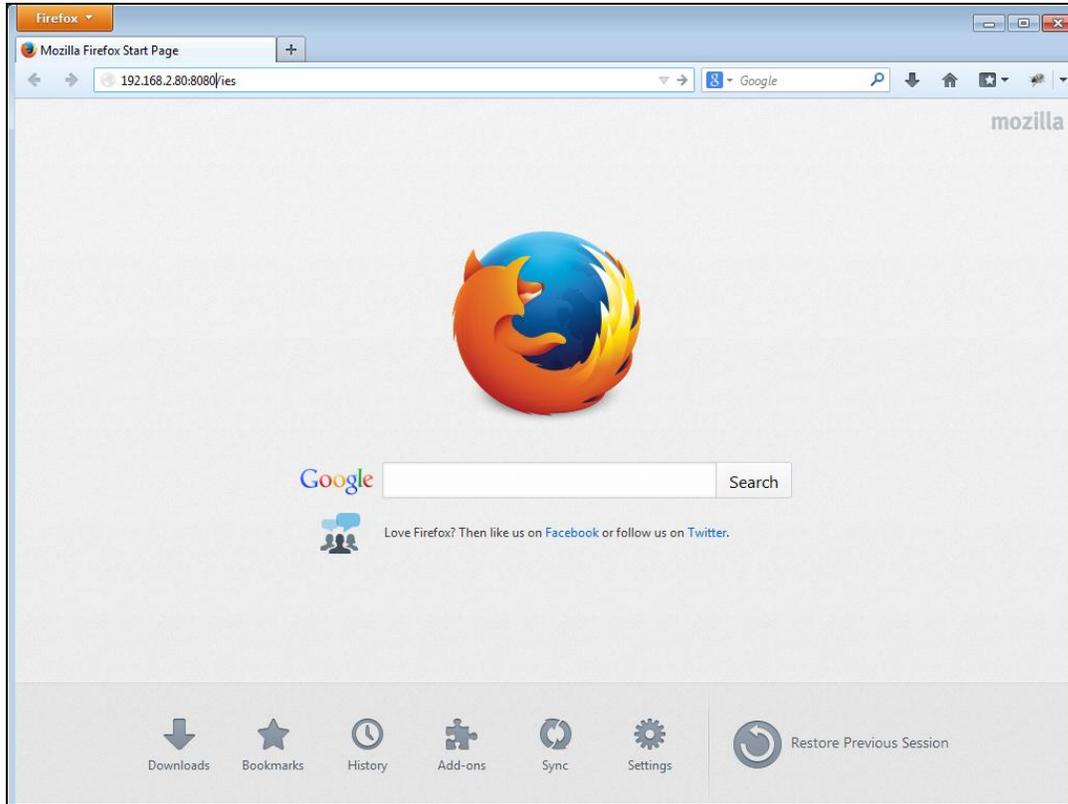
Slide 7
Slide notes: For example, as shown above.

Slide 8
Slide notes: